



Asphalt Patching TRUCKS




Built for Productivity. Trusted for Performance.

With a Thermo-Lay asphalt patching truck, your two-person crew has everything they need to deliver permanent, high-quality repairs—day in and day out. Designed for safety, productivity, and operator ease, every feature helps your team get more done with less hassle.

Key advantages include:

- **Dual touchscreen controls** (in-cab and tailgate) for intuitive operation.
- **Actively cooled hydraulics** powered by truck PTO.
- **Clog-free conveyance system**—auger, anti-bridge bar, and 30" swivel chute—with available release agent auto-spray.
- **Radiant oil heating** for consistent mix temperature and superior workability.
- **CAN bus** for simplified wiring, rapid diagnostics, and minimal downtime.
- **Safety features** to protect your crew in the field: dual emergency stops, hopper door lockout, high-vis strobes, backup camera, arrow board, reflectors, fire extinguishers, and first aid kit.

Whether you're repairing potholes, utility cuts, or general asphalt failures, Thermo-Lay delivers the confidence, control, and convenience your crew demands.

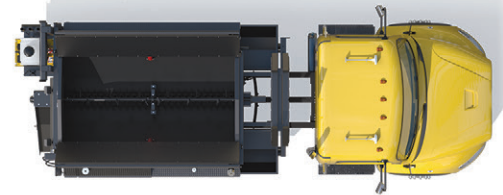

**BUILD YOURS
TODAY**
see back page



Build Your Thermo-Lay TRUCK

1 SELECT MODEL

2 SELECT OPTIONS

3 SELECT WARRANTY

1 year ☐

2 year ☐

3 year ☐

4 year ☐

5 year ☐

conveyance

compaction

access

lighting

storage

utility

misc.

hopper capacity	7830 lb / 2 yd ³	16,000 lb / 4¼ yd ³	24,500 lb / 6¼ yd ³
propane burner / tank	350 kBTU / 30 gal	350 kBTU / 30 gal	350 kBTU / 30 gal
heat transfer fluid	55 gal	110 gal	165 gal
overnight heater	9 kW	9 kW	9 kW
hydraulic / solvent / waste tanks	25 / 5 / 5 gal	25 / 10 / 10 gal	25 / 10 / 10 gal
unit size / weight†	82"×78"×63" 4,500 lb	136"×78"×63" 9,000 lb	190"×78"×63" 11,250 lb
chassis GVWR	min. 17,500 lb single-axle	min. 33,000 lb single-axle	min 46,000 lb tandem-axle

2 yd

4¼ yd

6¼ yd

AR400 steel auger	☐	☐	☐
AR514 steel auger trough	☐	☐	☐
24" chute extension w/ hinge	☐	☐	☐
Wacker BPS1550BW compactor	☐	☐	☐
Bomag BVP18/45 compactor	☐	☐	☐
Bomag BW55e roller	☐	☐	☐
rear lift for roller/compactor	☐	☐	☐
front lift for roller/compactor	☐	☐	☐
Stanley BR67 breaker	☐	☐	☐
platform between cab & hopper	☐	☐	☐
rear folding ladder and platform	☐	☐	☐
two-sided arrow board (hydraulic)	☐	☐	☐
front work light	☐	☐	☐
rear work light	☐	☐	☐
hydraulically operated spoils bin	☐	☐	☐
heated tack tank + 25' hose reel	☐	☐	☐
8-gal water tank + hose	☐	☐	☐
30-gal water tank + hose	☐	☐	☐
toolbox (specify size & location)	☐	☐	☐
tool rack	☐	☐	☐
30-cfm compressor + 25' hose reel	☐	☐	☐
hydraulic tool circuit + 25' hose reel	☐	☐	☐
propane hand torch w/ 25' hose	☐	☐	☐
hose reel for propane torch	☐	☐	☐
hopper release agent coating sys.	☐	☐	☐
aluminum fenders	☐	☐	☐
poly fenders	☐	☐	☐
load scales	☐	☐	☐

† weight and dimensions subject to variance based on final configuration

check driver side, passenger side, or both (double the price)

‡ option availability depends on specific chassis selected